



COMPACT SUBGRADE TO 100%
STANDARD PROCTOR DENSITY
@ ± 2.0% of OPTIMUM MOISTURE CONTENT

ROLLED CURB & 250mm GUTTER

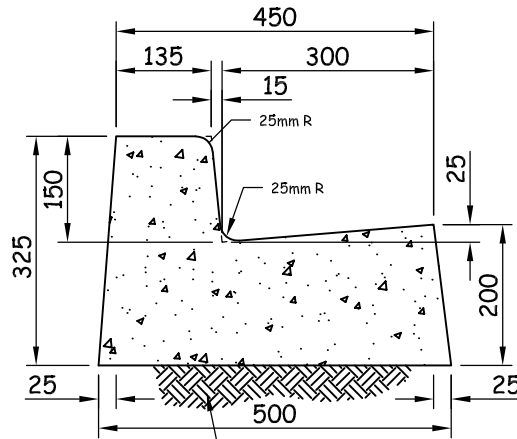

COMPACT SUBGRADE TO 100%
STANDARD PROCTOR DENSITY
@ ± 2.0% of OPTIMUM MOISTURE CONTENT

150mm STANDARD CURB & 300mm GUTTER

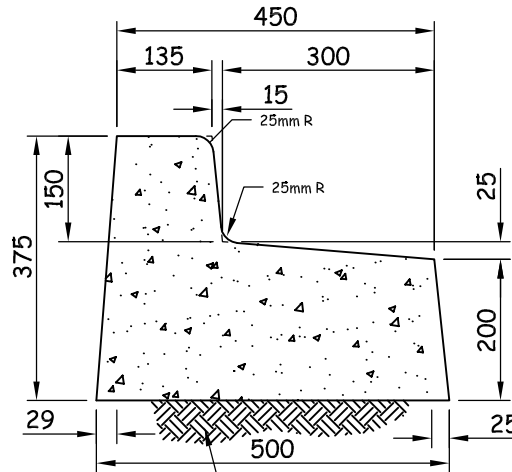

COMPACT SUBGRADE TO 100%
STANDARD PROCTOR DENSITY
@ ± 2.0% of OPTIMUM MOISTURE CONTENT

150mm STANDARD CURB WITH REVERSE GUTTER

NOTES:

1. CONCRETE TO BE TYPE 50, 25 Mpa, 5%-8% AIR, WITH 300kg/m³ CEMENT.
TO A MAX OF 360 kg/m³ OF CEMENTATIOUS MATERIAL
2. ALL DIMENSIONS ARE IN MILLIMETRES.

Authorized

Signature _____

Date _____

FILE: DRAWING1.DWG LAYOUT RD-202



Medicine Hat
The Gas City

Municipal Servicing Standard

CURB & GUTTER
SECTIONS

DWG. NO.
RD-301